


外球面轴承
PILLOW BLOCK BEARING

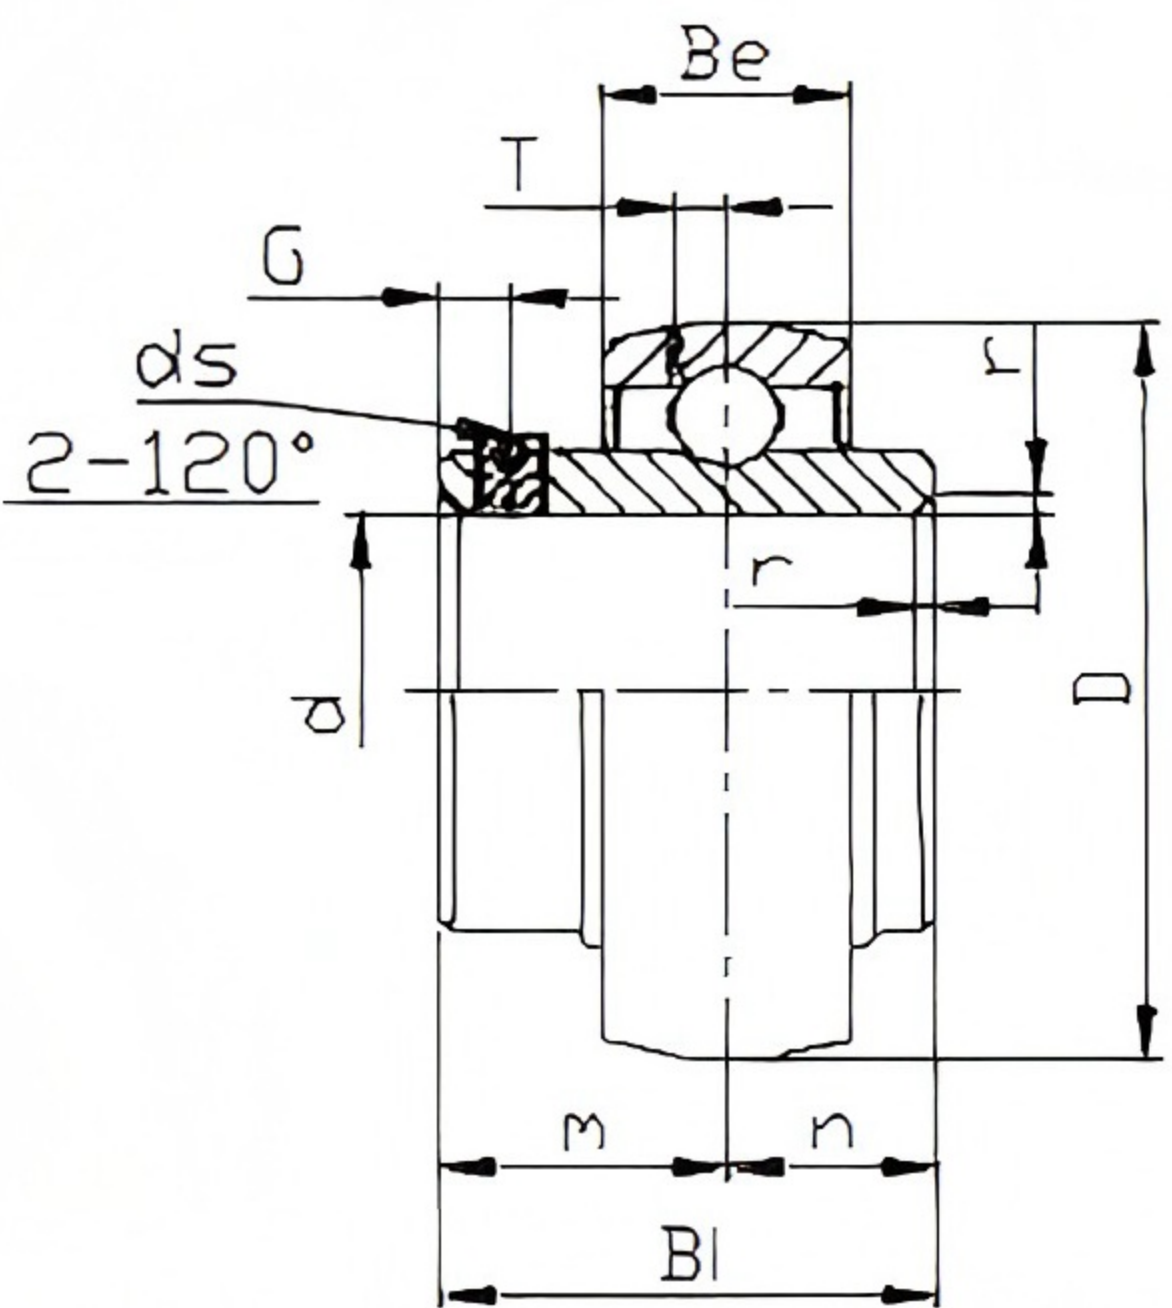

UC200 SERIES
UC200 系列

滚动轴承号 Bearing NO.	轴承 Bore Dia (mm)		基本尺寸 Dimensions (mm)									额定动载荷 Basic Load Rating (kg)	额定静载荷 Basic Static Load Rating (kg)	重量 Weight (kg)
	(h)	(mm)	D	B1	Bo	r	n	m	O	ds	T			
UC201-8 202-10 203-11 UC201 202 203	1/2 5/8 11/16	12 16 17	40	20	15	1	10	10	4	10-32UHF M5 x 0.8	4	900	900	0.10 0.10 0.17 0.16 0.20 0.18
UC201-8 202-10 203-11 204-12 UC201 202 203 204	1/2 5/8 11/16 3/4	12 16 17 20	47	31	17	1	12.7	16.3	4.5	1/4-28 M6 x 0.75	3.7	1000	630	0.20 0.10 0.18 0.10 0.21 0.10 0.18 0.10
UC205-14 206-16 209-18 UC205	7/8 16/16 1	25	52	34.1	17	1.5	14.3	19.8	5	1/4-28 M6 x 0.75	3.9	1100	710	0.22 0.20 0.10 0.10
UC206-17 206-18 208-19 208-20 UC206	1-1/10 1-1/8 1-3/8 1-1/4	30	62	38.1	19	1.5	15.9	22.2	6	5/16-24 M8 x 1	6	1640	1000	0.30 0.24 0.32 0.31 0.31
UC207-20 207-21 207-22 207-23 UC207	1-1/4 1-5/8 1-3/4 1-7/8	35	72	42.9	20	2	17.5	25.4	6	5/16-24 M8 x 1	6.7	2030	1400	0.52 0.60 0.48 0.46 0.46
UC208-24 208-25 UC208	1-1/2 1-9/16	40	80	48.2	21	2	18.0	30.2	8	5/16-24 M8 x 1	6.2	2300	1600	0.68 0.64 0.63
UC209-26 209-27 209-28 UC209	1-5/8 1-11/16 1-3/4	45	86	48.2	22	2	18.0	30.2	8	5/16-24 M8 x 1	6.4	2000	1810	0.70 0.74 0.70 0.68
UC210-30 210-31 UC210	1-7/8 1-15/16	50	90	51.6	24	2	18.0	32.5	10	3/8-24 M10 x 1.25	6.5	2750	2000	0.85 0.80 0.78
UC211-32 211-34 211-35 UC211	2 2-1/8 2-3/8	55	100	55.8	25	2.5	22.2	33.4	10	3/8-24 M10 x 1.25	7	3400	2550	1.22 1.10 1.06 1.07
UC212-36 212-38 212-39 UC212	2-1/4 2-3/8 2-7/8	60	110	65.1	27	2.5	25.4	39.7	10	3/8-24 M10 x 1.25	7.6	4100	3150	1.85 1.40 1.42 1.52
UC213-40 UC213	2-1/2	65	120	68.1	28	2.5	25.4	39.7	10	3/8-24 M10 x 1.25	8.9	4400	3470	1.88 1.80
UC214-44 UC214	2-3/4	70	125	74.0	30	2.5	30.2	44.4	12	7/16-20 M12 x 1.5	8.9	4670	3810	2.07 2.06
UC215-47 215-48 UC215	2-15/16 3	75	130	77.8	32	2.5	33.3	44.5	12	7/16-20 M12 x 1.5	8.9	5200	4200	2.21 2.11 2.10
UC216-50 UC216	3-1/8	80	140	82.8	33	3	33.3	49.3	14	7/16-20 M12 x 1.5	9.8	5700	4550	2.90 2.82
UC217-52 UC217	3-1/4	85	160	85.7	36	3	34.1	61.8	14	7/16-20 M12 x 1.5	10	6600	5100	3.56 3.48
UC218-56 UC218	3-1/2	90	160	90.0	37	3	39.7	66.3	16	7/16-20 M12 x 1.5	11	7650	6170	4.62 4.51